




## MX40 RX

- MX40 Combines cutting edge technology with a modern and elegant design. This exit sign is ideal to use in any environments, such as hotels, hospitals, shopping malls and similar places where the look matters most.
- MX40 is very easy and fast to install thanks to a separate mounting base, into which also the power supply is connected. It can be mounted ceiling or wall.
- MX40 is fully compatible with Panasonic addressable system, while fulfilling all the emergency light standards.
- This is an innovative LED exit light of the new generation. Additional function: During an emergency, displaying a red 'X' to signify an area as closed or blocked.

|                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                                        |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
|  |  |  |  | <b>EN-STANDARDS</b><br><b>EN 60598-2-22</b><br><b>EN 1838</b><br><b>EN 62034</b><br><b>EN ISO 7010</b> |
|  |  |  |  |                                                                                                        |

### Technical information:

- Viewing distance: 40m
- Supply voltage: 24V DC
- Light Source: LED
- Input power: 1,0W
- Insulation class: II
- Battery: NiMH 1.2V / 1h, 2.4V / 3h
- IP Class: 41
- Colour: RAL
- Material: PC, Acryl
- Temperature range: 0 - +55 C°

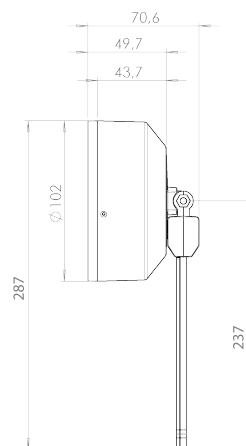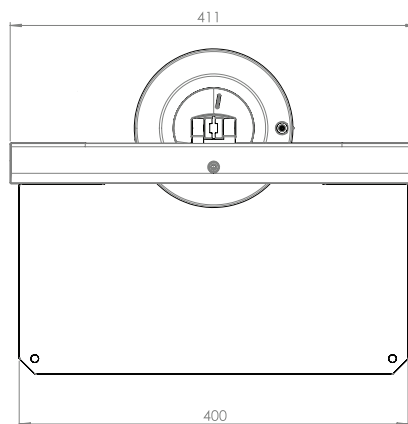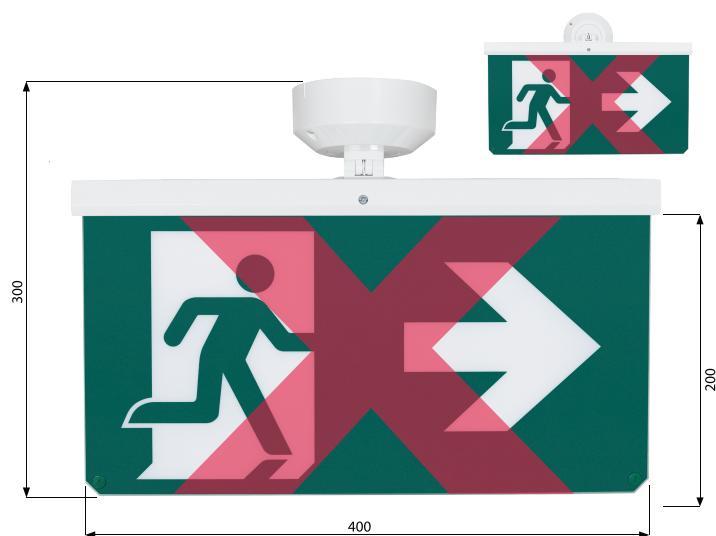

| Product No. | Name          | Viewing distance | Supply Voltage | Sign                | Battery   | Backup |
|-------------|---------------|------------------|----------------|---------------------|-----------|--------|
| 840101      | MX40 RX       | 40m              | 24V DC         | See pictogram chart | NiMH 1.2V | 1h     |
| 840301      | MX40 RX       | 40m              | 24V DC         | See pictogram chart | NiMH 2.4V | 3h     |
| 840303      | MX40 RX Black | 40m              | 24V DC         | See pictogram chart | NiMH 2.4V | 3h     |

## PICTOGRAM CHART

| Product No. | Name                          | Sign           |
|-------------|-------------------------------|----------------|
| 970008      | MX40 pictogram left           | E1             |
| 970009      | MX40 pictogram right          | E2             |
| 970010      | MX40 Pictogram down           | E3             |
| 970011      | MX25 Pictogram up             | E4             |
| 970015      | MX25 Pictogram (special sign) | HCP Kit        |
| 970031      | MX25 Pictogram (special sign) | HCP Kit Norway |

