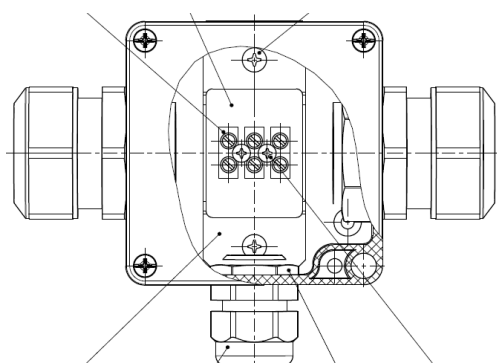


Short description	WCU 535 PC	
Art.-No.	11-2300046-01-01	
Long description UB	Wiring Connection Unit 25, WCU 535 PC	
Description	For use in aspiration lines of the SecuriSmoke ASD 535 aspirating smoke detector in deep-freeze applications down to minus 30°C. • For cable entry of the supply of sampling points with heating into the aspiration pipe, with internal clamps. • For professional connection of the silicone wires for the aspiration fitting sets (heaters) • The connection between the aspirating smoke detector and the boiler connection unit WCU 535 PC is made by means of installation / fire alarm cable • Incl. two M32 connection fittings for the aspirating line • Incl. one M20 connection fitting for the installation cable	
Components	• Housing • Clamp three pole (in the housing) • 2 pcs M32x1.5 mm cable glands for 25mm • 1 pcs M20x1.5mm cable gland with feedthrough of 1x or 2x 6 mm	
Operating temperature	-30°C bis +60°C	
Dimensions	150 x 112 x 85 mm (with cable glands)	
Weight	317g	
Notes	one packing unit = 1 Stk Color: light grey (RAL 7035)	
Reference / Manufacturer	For more details, please refer to the guidelines for frozen storage.	


Note

This data sheet version is valid until it is replaced by a newer version. The user of the document is responsible for informing himself/herself about the current status of the document at the publisher. There is no legal claim for incorrect information in this document that was not known to the publisher at the time of publication.

Foreign language documents are always released or amended at the same time as the German edition. In case of deviations in the foreign language document, the German language text of the document is binding.